


SPECIFICATION

Input Voltage	230 – 240V AC 50/60 Hz
Recharge period	12 hours
Duration	3 hours
Viewing Distance	30m
IP Rating	IP40
Material	White polycarbonate body
Panel Dimensions	L 300 mm x H 150 mm x W 20 mm
Recessed Module Dimensions	L 335 mm x H 187 mm x W 57 mm
Legend Arrows	Arrow up, arrow down, arrow left and arrow right
Conformity	BS 61000-3-3:2013+A2:2021, BS 61347-1:2015+A1:2021, BS EN IEC 62031:2020+A11:2021, UKCA
Warranty	5 Years
Switchable Maintained	
Power	2W 55mA $\lambda = 0.6$ Maintained
Battery Type	6.4V 3.0Ah LiFePO4 Cells
Charge Current	0-400mA Dual Rate Charge
Weight	1.42 Kg
DALI Self-test Maintained	
Power	2W 40mA $\lambda = 0.6$ Maintained
Battery Type	9.6V 1.5Ah LiFePO4 Cells
Charge Current	0-150mA Dual Rate Charge
Weight	1.43 Kg



DIMENSIONS

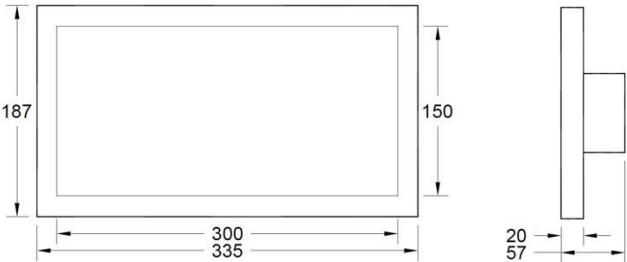

PRODUCT ORDER CODE

CODE	PRODUCT SPECIFICATION
EM-LP-SIGN8-STD	Exit Sign Wall, Standard, C/W Legend Set
EM-LP-SIGN8-DALI	Exit Sign Wall, DALI, C/W Legend Set

