


SPECIFICATION

Light Source	LED
Lumen Output	510 lm
Power Rating Charged	1.2W 13mA $\lambda = 0.43$
Power Rating – Charging	3.8W 23mA $\lambda = 0.69$
Power Rating DALI – Charging	4.0W 21mA $\lambda = 0.79$
Input Voltage	230-240V AC 50/60Hz
Version	Non-maintained
Emergency	Standard DALI self-test
Duration	3 hours
Recharge Duration	24 hours
Battery Type	6.4V 4.8Ah LiFePO4
Current	225mA Nominal
Ingress Protection	IP65
Electrical Class	I
Operating Temperature	0°C ~ 35°C
Finish	White
Dimensions	L 300 mm x W 280 mm x D 95 mm
Material	Aluminium/polycarbonate
Installation	Surface/wall
Weight	2kg
Conformity	UKCA, CE, RoHS, Deep discharge protection, BS EN 61347-2-7
Warranty	5 Years



DIMENSIONS

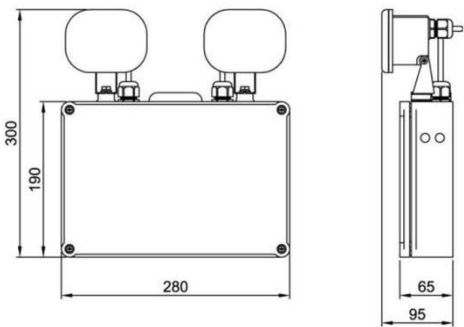

PRODUCT ORDER CODE

CODE	PRODUCT SPECIFICATION
EM-LP-TWIN-IP65-LO-WH-STD	IP65 Twin beam standard emergency
EM-LP-TWIN-IP65-LO-WH-DALI-ST	IP65 Twin beam DALI/S-test emergency

