


SPECIFICATION

Colour Temperature CCT	3000K and 4000K with integrated switch to select colour temperature.	
Light Source	Indirect LED light source offering high visual comfort	
Distribution	180°	360°
Power	9W	12W
Diameter	Ø118 mm	
Height	300 mm 1000 mm	
Finish	RAL9004	
Efficacy	Up to 90 lm/W	
CRI	>80	
Controls	Fixed output	
Installation	Surface-mounted	
Material – Body	Extruded aluminium	
Material – Lamp Head	Die-cast aluminium	
Material – Diffuser	High transparency polycarbonate	
Protection	UV protected pure polyester powder coated housing offering high corrosion resistance.	
Ingress Protection	IP65	
Impact Rating	IK09	
Lifetime	70,000hrs	
Operating Temperature	-20°C to +50°C”	
Conformity	UKCA, CE, RoHS, Class I	
Warranty	5 Years	



DIMENSIONS

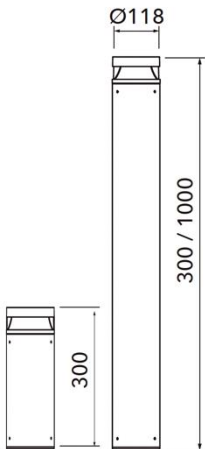

PRODUCT ORDER CODE

CODE	POWER	CCT	DISTRIBUTION	FINISH	DRIVER	DIMENSIONS	LUMEN OUTPUT
KNIGHT-9-118-180-300	9W	3000K/4000K	180°	RAL9004	Fixed Output	Ø118 X H300 mm	754/799 lm
KNIGHT-9-118-180-1000	9W	3000K/4000K	180°	RAL9004	Fixed Output	Ø118 X H1000 mm	754/799 lm
KNIGHT-12-118-360-300	12W	3000K/4000K	360°	RAL9004	Fixed Output	Ø118 X H300 mm	1138/1199 lm
KNIGHT-12-118-360-1000	12W	3000K/4000K	360°	RAL9004	Fixed Output	Ø118 X H1000 mm	1138/1199 lm