

EM_SIGN 5 EMERGENCY LUMINARE

EM-SIGN 5 is our range of high-quality LED exit sign luminaires, ideal for contemporary architectural environments and integration into existing installations. There are two different mounting options available: ceiling and wall. The housing features 8 high-output SAMSUNG white LEDs that deliver up to a 36m viewing distance. The flame-retardant clear acrylic plate features a single-sided legend, ensuring uniform illumination of the safety sign legend.


FEATURES

- Ceiling or wall mounted
- 8 high output SAMSUNG white LEDs
- 36m viewing distance
- Available in a range of colour finishes including brushed brass and chrome effect
- Maintained emergency operation as standard
- Housing - sheet steel folded metal
- 5000K colour temperature
- Single-sided legend panel
- IP40 ingress protection as standard

SPECIFICATION

Colour Temperature CCT	5000K
Power	1W
View Distance	36 m
Battery	4.8V 1.3A/h Ni-Mh
Emergency	3 Hours
Finish	White RAL9016 Black 9017 Brushed Brass Brushed Chrome
Dimensions – Ceiling/Surface	L 324 mm x H 185 mm x \varnothing 52 mm
Dimensions – Wall	L 324 mm x H 185 mm x \varnothing 52 mm
Legend Panels	Up Down Right Left
Exit Sign	Single-sided
Operating Voltage	220/240V 50/60HZ
Material - Housing	Folded Steel
Material - Panel	Clear Acrylic
Cable	20mm cable entry on rear of main bracket
Installation	Ceiling Wall
Ingress Protection	IP40
Weight	2.1 kg
Operating Temperature	-0°C~45°C
Conformity	No UV or IR Emissions, UKCA, Class I, RoHS,
Warranty	6 Years

DIMENSIONS

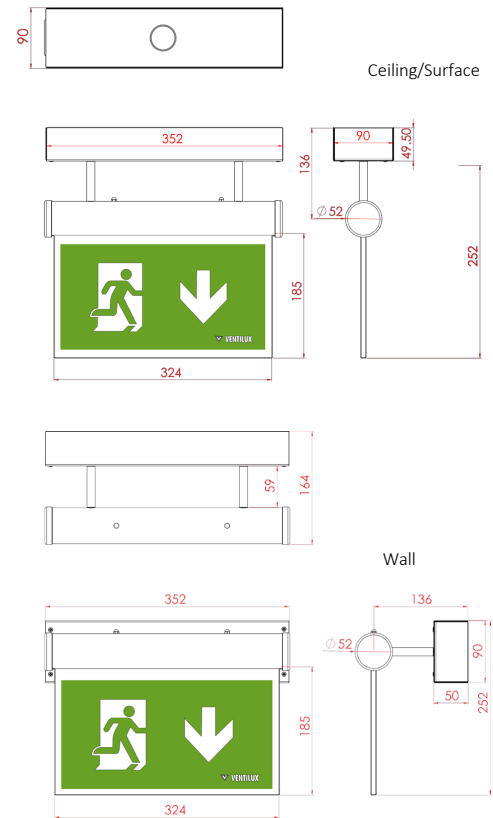

OPTIONS



PRODUCT ORDER CODE

EXAMPLE: EMSIGN5-S15BRSEAD

PREFIX	INSTALLATION	POWER	CCT	FINISH	EMERGENCY	PANELS
EMSIGN5 –	S ceiling/surface	1 1W	5 5000K	W white	SE standard emergency	AU arrow up
	W wall			B black	DE DALI emergency	AD arrow down
				BR brushed brass	M maintained	AL arrow left
				C brushed chrome	NM non-maintained	AR arrow right