



EM_SIGN 7 EMERGENCY LUMINARE

EM-SIGN 7 is our range of high-quality LED exit sign luminaires, ideal for contemporary architectural environments and integration into existing installations.

Its versatile mounting options allow for surface or recessed placements. With rear or top cable entry options, surface conduit requirements are easily met, and the product's geometry facilitates concealed cable entry, particularly in stairwell mounting situations.

The flame-retardant clear acrylic plate features a double or single-sided legend, delivering up to a 26m viewing distance and ensuring uniform illumination.



FEATURES

- Wall mounted, surface/ceiling or recessed options
- 26m viewing distance
- Available in a range of colour finishes including brass and chrome effects
- Double and single-sided legend panels
- IP20 ingress protection
- IK07 Impact rating



SPECIFICATION

| | |
|-------------------------|--|
| Colour Temperature CCT | 5000K |
| Power - Maintained | 1W |
| View Distance | 26 m |
| Emergency | 3 Hours |
| Finish | Polished Brass Polished Chrome Antique Brass Grey White Black Satin Chrome Penny Bronze |
| Dimensions | See dimensions chart |
| Exit Sign Legend Panels | Up Down Right Left |
| Exit Sign | Single-sided Double |
| Operating Voltage | 220/240V 50/60HZ |
| Material - Housing | Aluminium |
| Material - Panel | Clear Acrylic |
| Cable | 20mm cable entry on rear of main bracket |
| Installation | Ceiling/Surface Wall Recessed |
| Ingress Protection | IP20 |
| Impact Rating | IK07 |
| Weight | 1.5 kg |
| Operating Temperature | -0°C ~45°C |
| Conformity | No UV or IR Emissions, UKCA, Class I, RoHS, |
| Warranty | 6 Years |


PRODUCT ORDER CODE

EXAMPLE: EMSIGN7-W15WSEAU


| PREFIX | INSTALLATION | POWER | CCT | FINISH | EMERGENCY | PANELS | |
|-----------|-------------------------------|----------------|-------------------|-----------------------------|---------------------------------|-----------------------------|--|
| EMSIGN7 – | W wall | 1 1W | 5 5000K | W white | SE standard emergency | AU arrow up | |
| | S surface/ceiling | | | B Black | | DE DALI emergency | AD arrow down |
| | RS recessed surface | | | G grey | | M maintained | AL arrow left |
| | RW recessed wall | | | BR polished brass | | NM non-maintained | AR arrow right |
| | | | | AB antique brass | | | *please specific single-sided or double when ordering. |
| | | | | PB penny brass | | | |
| | | | | C polished chrome | | | |
| | SC satin chrome | | | | | | |

DIMENSIONS


Wall

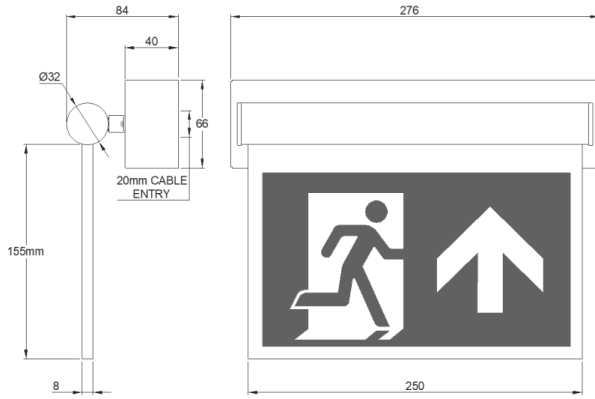

Ceiling/Surface

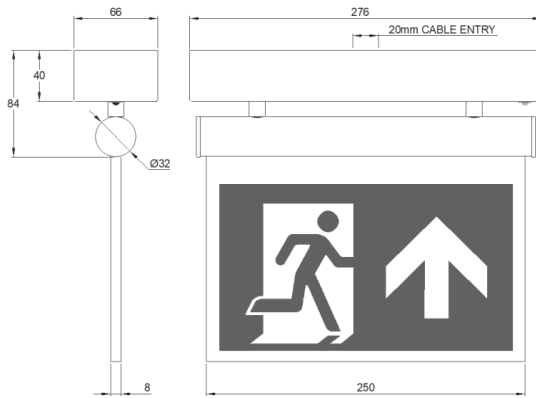

Recessed - Wall

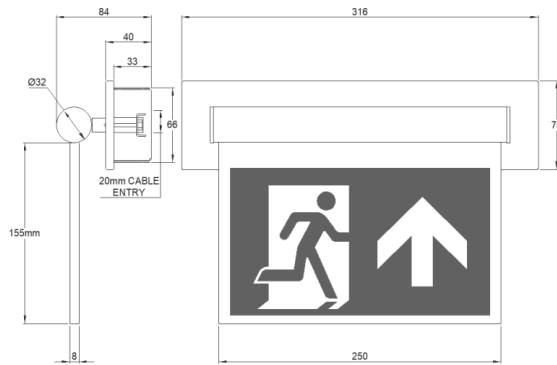

Recessed - Surface/Ceiling

